
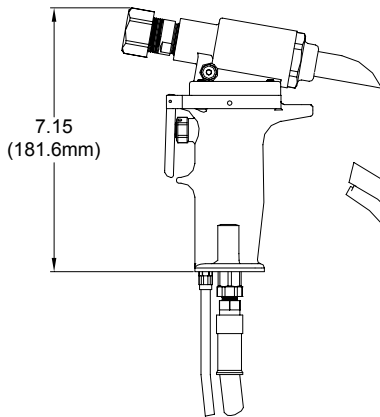


GB751

INSTALLATION TOOL SERIES



GB751

Stroke - .780"
 Hand held weight - 4.50 lbs.
 Entire tool weight - 4.50 lbs
 Pull load - 2,200

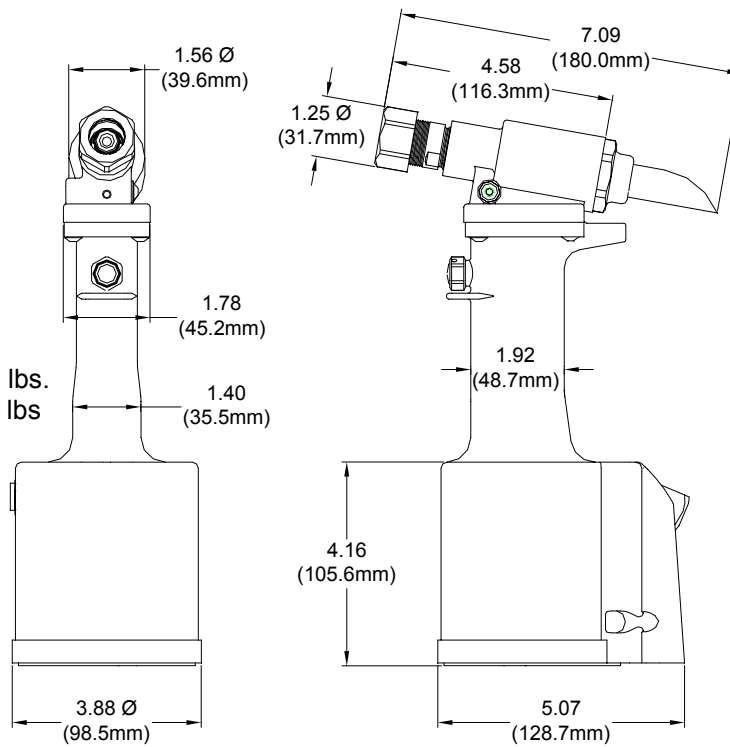


GB751SH

Stroke - .780"
 Hand held weight - 2.25 lbs.
 Entire tool weight - 7.25 lbs
 Pull load - 2,200

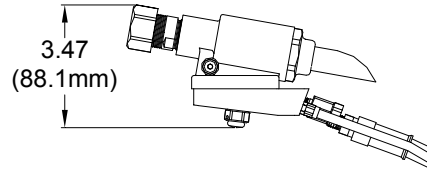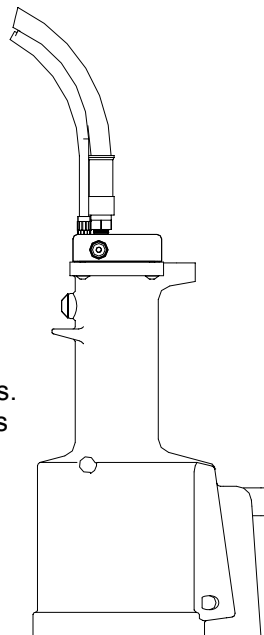

GB751SR

Stroke - .780"
 Hand held weight - 1.75 lbs.
 Entire tool weight - 6.75 lbs
 Pull load - 2,200

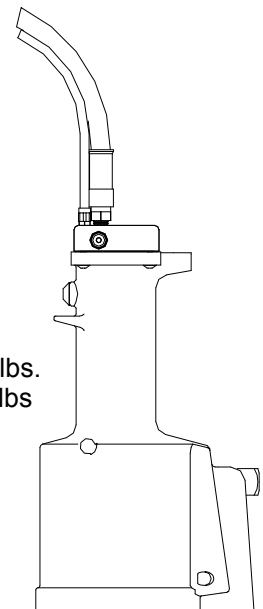

GAGE BILT

MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
 Clinton Twp. MI 48038 (586) 226-1505 Fax
 e-mail: solutions@gagebilt.com / www.gagebilt.com

DESCRIPTION

The GB751 series are pneumatic-hydraulic tools designed specifically for the efficient installation of a wide range of blind rivets. They can be operated in any position with one hand. They have a rated pull load of 2200 pounds with 90 psi air pressure at the air inlet.

The GB751SH and GB751SR riveters offer a unique “split” system providing the operator with an ergonomic tool with reduced hand held weight, as shown below.

The GB751 series riveters operate on a wide range of air pressure, with 90 to 100 psi providing the maximum efficiency. At 90 psi air pressure, the GB751 series does not exceed 81.5 db (A) and consumes 3 cfm at 20 cycles a minute.

The air inlet is provided with 1/4-18 female pipe threads to accept the users air hose fitting.

NOSE ASSEMBLIES ARE NOT FURNISHED WITH THIS RIVETER AND MUST BE ORDERED SEPARATELY.



GB751- SELECTION CHART



FASTENER	DIA.	STRAIGHT	RIGHT ANGLE	OFFSET
BLIND BOLT (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U CR7000 SERIES, BACB30YY, Y U, & YT	5/32	SB05-752C-20 SB05-752C-80	SB05-752C-45	SB05-751B-54RA SB05-752A-43OS
EN6122 & UAB130-EU EN6127 & UAB6127-EU EN6128 & UAB100-EU EN6129 & UABP-EU	5/32 3/16 1/4	UAB568-713-21 4	UAB568-713-61 4	
BLIND RIVET (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER NAS1900 S & U SERIES	1/8 5/32 3/16 1/4 3	SMLS04-752C-20 SMLS05-752C-20 SMLS06-752C-20 SMLS08-713-20	SMLS04-752C-45 SMLS05-752C-45 SMLS06-752C-45 SMLS08-713-45	SMLS04-751B-54RA SMLS05-751B-54RA SMLS06-751B-54RA SMLS08-751B-54RA SMLS04-752A-43OS SMLS05-752A-43OS SMLS06-752A-43OS SMLS08-752A-43OS
"A" CODE NAS1398A & NAS1399A	3/32 1/8 5/32 3/16	3A-352B-25 4A-752C-20 5A-752C-20 6A-752C-20	3A-352-61 4A-752C-45 5A-752C-45 6A-752C-45	3A-751B-54RA 4A-751B-54RA 5A-751B-54RA 6A-751B-54RA 4A-752A-43OS 5A-752A-43OS 6A-752A-43OS
NUT PLATE RIVETS CCR244/264/274 BACR15DR MS20600	3/32 1/8	3NP-751-23 5N-751-23	3NP-352-61 5N-352-61	3NP-751B-54RA 45N-751B-54RA 3NP-751-43OS 5N-751-43OS
CHERRY MAX® CHERRY MAX® 'AB' MBC® LOCK CREATOR BACR15FR/FP, BACR15GF/GK,	1/8 5/32 3/16	456MAX-751A-21 2	456MAX-751A-61 2	456MAX-751C-54RA 2 456MAX-731-43OS 2
NAS1900 S & U SERIES BLIND RIVET WITH DRIVE WASHER	1/8 5/32 3/16	456UBR-751A-21 2	456UBR-751A-61 2	456MAX-751C-54RA 2 456MAX-731-43OS 2
ASP® ASP 2, ASP PF, ASP 4 FF, ASP 2 F, ASP 2 LC	13/64	ASP06-752C-20	ASP06-752C-45	ASP06-751B-54RA ASP06-752A-43OS
NAS1719, NAS1720 NAS1721	1/8 5/32 3/16	MBC04-752C-20 MBC05-752C-20 MBC06-752C-20	MBC04-752C-45 MBC05-752C-45 MBC06-752C-45	MBC04-751B-54RA MBC05-751B-54RA MBC06-751B-54RA MBC04-752A-43OS MBC05-752A-43OS MBC06-752A-43OS
GROUND STUD, M83454 & BACS53B	8/32 10/32	GS8-752C-20 GS10-752C-20	GS8-752C-45 GS10-752C-45	GS8-751B-54RA GS10-752A-54RA GS8-752A-43OS GS10-752A-43OS
OPEN END NAIL RIVET	3/32 1/8 5/32 3/16	3N-751-23 4N-751-23 5N-751-23 6N-751-23	3N-352-61 4N-352-61 5N-352-61 6N-352-61	3N-751B-54RA 45N-751B-54RA 45N-751B-54RA 6N-751C-54RA 3N-751-43OS 4N-751-43OS 5N-751-43OS 6N-751-43OS
CLOSED END NAIL RIVET (ALUMINUM MANDREL)	3/32 1/8 5/32 3/16	3CEA-751-23 4CEA-751-23 5CEA-751-23 6CEA-751-23	3CEA-352-61 4CEA-352-61 5CEA-352-61 6CEA-352-61	3CEA-751B-54RA 45CEA-751B-54RA 45CEA-751B-54RA 6CEA-751C-54RA 3CEA-751-43OS 4CEA-751-43OS 5CEA-751-43OS 6CEA-751-43OS
CLOSED END NAIL RIVET (STEEL MANDREL)	3/32 1/8 5/32 3/16	3CES-751-23 4CES-751-23 5CES-751-23 6CES-751-23	3CES-352-61 4CES-352-61 5CES-352-61 6CES-352-61	3CES-751B-54RA 45CES-751B-54RA 45CES-751B-54RA 6CES-751C-54RA 3CES-751-43OS 4CES-751-43OS 5CES-751-43OS 6CES-751-43OS

ASP® IS A REGISTERED TRADEMARK OF ALCOA INC. CHERRY MAX® AND MBC® ARE REGISTERED TRADEMARKS OF CHERRY AEROSPACE

GAGE BILT CERTIFIES THE GB751 WILL INSTALL THE ABOVE FASTENER

1) RIGHT ANGLE NOSE ASSEMBLIES MAY REQUIRE MORE THAN ONE PULL.
2) INSTALLS 1/8", 5/32" & 3/16" DIAMETERS.
3) ALUMINUM ONLY.
4) INSTALLS 5/32", 3/16" & 1/4" DIAMETERS.

NOTE: THE LAST 2 DIGITS OF THE NOSE ASSEMBLY REPRESENTS THE LENGTH
THE NOSE EXTENDS FROM THE TOOL. I.E. -20 = 2.0 INCHES

4/13

GAGE BILT ALSO SUPPLIES PIN & COLLAR SWAGE INSPECTION GAGES TO CERTIFY CORRECT SWAGE INSTALLATION.

