
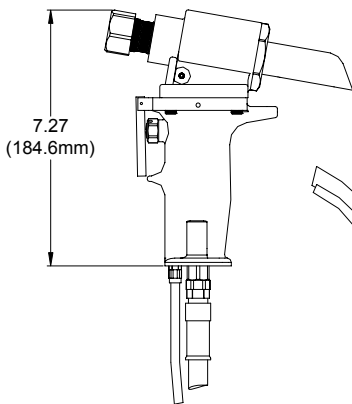
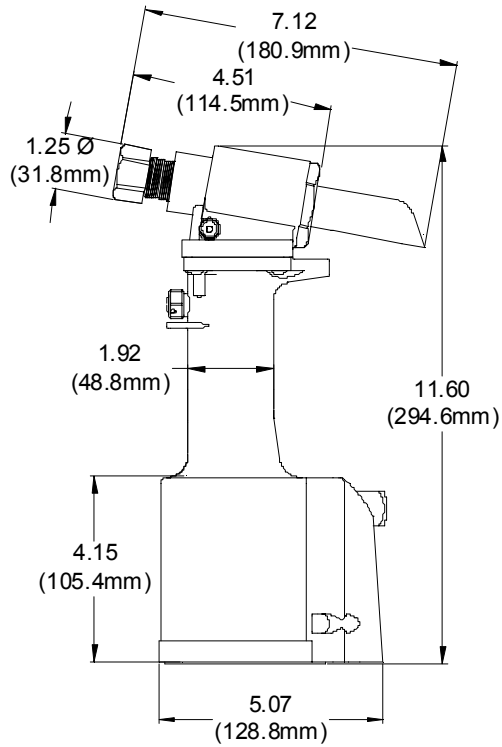


GB752

INSTALLATION TOOL SERIES



GB752

Stroke - .500"
 Hand held weight - 4.75 lbs.
 Entire tool weight - 4.75 lbs
 Pull load - 3,800

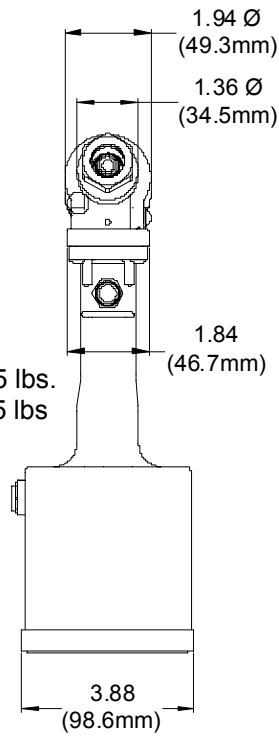


GB752SH

Stroke - .500"
 Hand held weight - 2.50 lbs.
 Entire tool weight - 7.50 lbs
 Pull load - 3,800

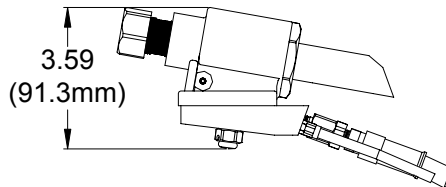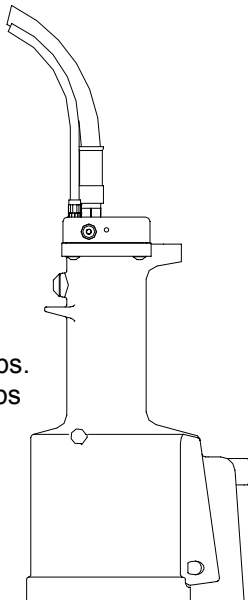

GB751SR

Stroke - .500"
 Hand held weight - 2.00 lbs.
 Entire tool weight - 7.00 lbs
 Pull load - 3,800

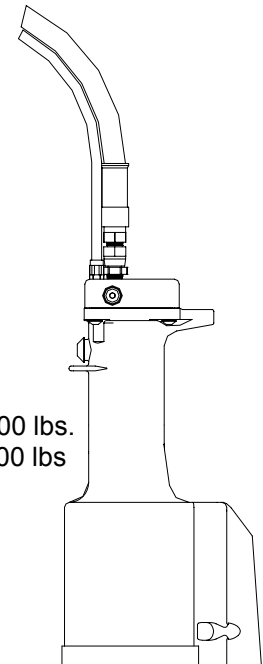

GAGE BILT

MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
 Clinton Twp. MI 48038 (586) 226-1505 Fax
 e-mail: solutions@gagebilt.com / www.gagebilt.com

DESCRIPTION

The GB752 series are pneumatic-hydraulic tools designed specifically for the efficient installation of a wide range of blind rivets. They can be operated in any position with one hand. They have a rated pull load of 3800 pounds with 90 psi air pressure at the air inlet.

The GB752SH and GB752SR riveters offer a unique "split" system providing the operator with an ergonomic tool with reduced hand held weight, as shown below.

The GB752 series riveters operate on a wide range of air pressure, with 90 to 100 psi providing the maximum efficiency. At 90 psi air pressure, the GB752 series does not exceed 81.5 db (A) and consumes 3 cfm at 20 cycles a minute.

The air inlet is provided with 1/4-18 female pipe threads to accept the users air hose fitting.

NOSE ASSEMBLIES ARE NOT FURNISHED WITH THIS RIVETER AND MUST BE ORDERED SEPARATELY.



GB752- SELECTION CHART



FASTENER	DIA.	STRAIGHT	*RIGHT ANGLE	**OFFSET	
COMMERCIAL LOCKBOLTS	3/16	LB06-722-20	LB06-722-60		
	1/4	LB08-722-20	LB08-722-60		
MULTIGRIP LOCKBOLTS	3/16	MG06-722-20	MG06-722-60		
	1/4	MG08-722-20	MG08-722-60		
BLIND BOLT (SINGLE ACTION) WITH OR W/O DRIVE WASHER MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U CR7000 SERIES, BACB30YY, YU, & YT	1/8	SMLS04-752C-20	SMLS04-752C-45		
	5/32	SB05-752C-20	SB05-752C-45	SB05-751B-54RA SB05-752A-43OS	
	3/16	SB05-752C-80			
		SB06-752B-20	SB06-752B-45	SB06-751B-54RA	SB06-204D-27OS
EN6122 & UAB130-EU EN6127 & UAB6127-EU EN6128 & UAB100-EU EN6129 & UABP-EU EN6129 & UABP-EU	5/32	UBB05-752C-20	UBB05-752C-45	UBB05-751B-54RA UBB05-752A-43OS	
	3/16	UAB06-752C-20	UAB06-752C-45	UAB06-751B-54RA UAB06-752A-43OS	
BLIND RIVET (SINGLE ACTION) WITH OR W/O DRIVE WASHER NAS1900 S & U SERIES	1/8	SMLS04-752C-20	SMLS04-752C-45	SMLS04-751B-54RA SMLS04-752A-43OS	
	5/32	SMLS05-752C-20	SMLS05-752C-45	SMLS05-751B-54RA SMLS05-752A-43OS	
	3/16	SMLS06-752C-20	SMLS06-752C-45	SMLS06-751B-54RA SMLS06-752A-43OS	
	1/4	SMLS08-713-20	SMLS08-713-45	SMLS08-751B-54RA SMLS08-204D-27OS	
"A" CODE NAS1398A & NAS1399A	3/32	3A-352B-25		3A-751B-54RA	
	1/8	4A-752C-20	4A-752C-45	4A-751B-54RA 4A-752A-43OS	
	5/32	5A-752C-20	5A-752C-45	5A-751B-54RA 5A-752A-43OS	
	3/16	6A-752C-20	6A-752C-45	6A-751B-54RA 6A-752A-43OS	
1/4	SMLS08-713-20			SMLS08-204D-27OS	
NUT PLATE RIVETS CCR244/264/274 BACR15DR MS20600	3/32	3NP-751-23	3NP-352-61	3NP-751B-54RA 3NP-751-43OS	
	1/8	5N-751-23	5N-352-61	45N-751B-54RA 5N-751-43OS	
CHERRY MAX®, CHERRY MAX® 'AB', MBC® LOCK CREATOR BACR15FR/FP, BACR15GF/GK, NAS1900 S & U SERIES BLIND RIVET WITH DRIVE WASHER	1/8	2456MAX-751A-21	2456MAX-751A-61	2456MAX-751C-54RA 2456MAX-731-43OS	
	5/32				
	3/16				
	1/4	08MAX-752C-20	08MAX-752C-45	**08MAX-204D-27OS **08MAX-204D-37OS	
ASP® ASP 2, ASP PF, ASP 4 FF, ASP 2 F, ASP 2 LC	13/64	ASP06-752C-20	ASP06-752C-45	ASP06-751B-54RA ASP06-752A-43OS	
	17/64	ASP08-752C-20	ASP08-752C-45	ASP08-752A-43OS	
NAS1719, NAS1720 NAS1721	1/8	MBC04-752C-20	MBC04-752C-45	MBC04-751B-54RA MBC04-752A-43OS	
	5/32	MBC05-752C-20	MBC05-752C-45	MBC05-751B-54RA MBC05-752A-43OS	
	3/16	MBC06-752C-20	MBC06-752C-45	MBC06-751B-54RA MBC06-752A-43OS	
GROUND STUD, M83454 & BACS53B	8/32	GS8-752C-20	GS8-752C-45	GS8-751B-54RA GS8-752A-43OS	
	10/32	GS10-752C-20	GS10-752C-45	GS10-752A-54RA GS10-752A-43OS	
OPEN END NAIL RIVET	3/32	3N-751-23	3N-352-61	3N-751B-54RA 3N-751-43OS	
	1/8	4N-751-23	4N-352-61	45N-751B-54RA 4N-751-43OS	
	5/32	5N-751-23	5N-352-61	45N-751B-54RA 5N-751-43OS	
	3/16	6N-751-23	6N-352-61	6N-751C-54RA 6N-751-43OS	
CLOSED END NAIL RIVET (ALUMINUM MANDREL)	3/32	3CEA-751-23	3CEA-352-61	3CEA-751B-54RA 3CEA-751-43OS	
	1/8	4CEA-751-23	4CEA-352-61	45CEA-751B-54RA 4CEA-751-43OS	
	5/32	5CEA-751-23	5CEA-352-61	45CEA-751B-54RA 5CEA-751-43OS	
	3/16	6CEA-751-23	6CEA-352-61	6CEA-751C-54RA 6CEA-751-43OS	
CLOSED END NAIL RIVET (STEEL MANDREL)	3/32	3CES-751-23	3CES-352-61	3CES-751B-54RA 3CES-751-43OS	
	1/8	4CES-751-23	4CES-352-61	45CES-751B-54RA 4CES-751-43OS	
	5/32	5CES-751-23	5CES-352-61	45CES-751B-54RA 5CES-751-43OS	
	3/16	6CES-751-23	6CES-352-61	6CES-751C-54RA 6CES-751-43OS	

CHERRY MAX®, TRIVET® AND MBC® ARE REGISTERED TRADEMARKS OF CHERRY AEROSPACE FASTENERS. AVEX®, KLAMP-TITE®, TLR®, HEM LOK® AND MONOBOLT® ARE REGISTERED TRADEMARKS OF AVDEL UK LIMITED. ASP®, MAGNA-LOK® AND MAGNA-BULB® ARE REGISTERED TRADEMARKS OF ALCOA INC.

GAGE BILT CERTIFIES THE GB752 WILL INSTALL THE ABOVE FASTENERS

*ALL RIGHT ANGLE NOSES REQUIRE 752142 STROKE LIMITER
**ALL OFFSET 204 SERIES NOSES REQUIRE 751204 ADAPTER
1) RIGHT ANGLE NOSE ASSEMBLY'S MAY REQUIRE MORE THAN ONE PULL.
2) INSTALLS 1/8, 5/32 & 3/16 DIAMETERS
3) INSTALLS 5/32 & 3/16 DIAMETERS

NOTE: THE LAST 2 DIGITS OF THE NOSE ASSEMBLY REPRESENTS THE LENGTH THE NOSE EXTENDS FROM THE TOOL. I.E. -20 = 2.0 INCHES

7/13

GAGE BILT ALSO SUPPLIES PIN & COLLAR SWAGE INSPECTION GAGES TO CERTIFY CORRECT SWAGE INSTALLATION.

