



GB752 SERIES INSTALLATION TOOLS

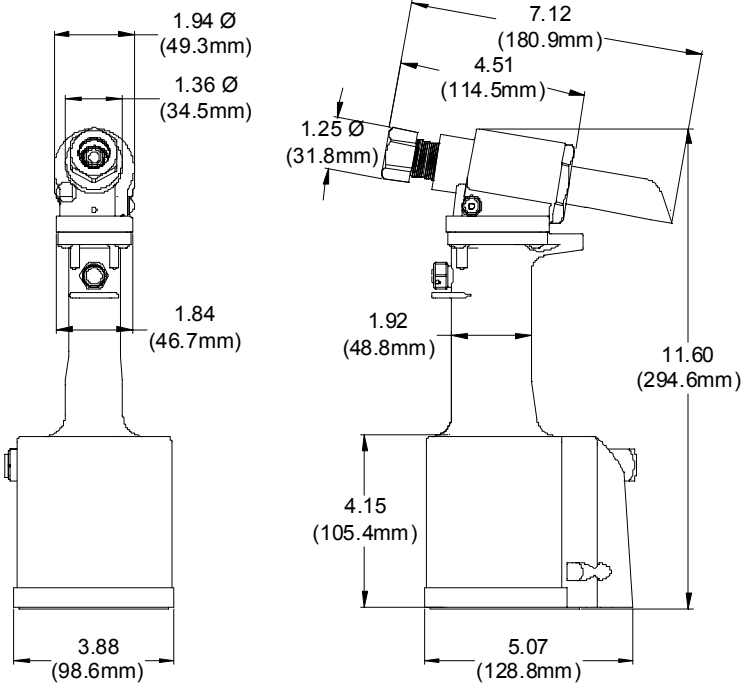


GB752

Stroke - .500"
 Hand held weight - 4.75 lbs.
 Entire tool weight - 4.75 lbs
 Pull load - 3,800

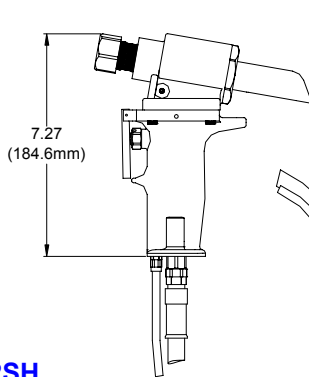

GB752SH

Stroke - .500"
 Hand held weight - 2.50 lbs.
 Entire tool weight - 7.50 lbs
 Pull load - 3,800

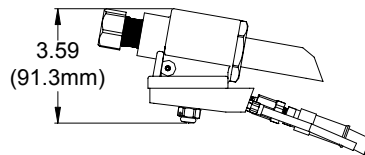

GB752SR

Stroke - .500"
 Hand held weight - 2.00 lbs.
 Entire tool weight - 7.00 lbs
 Pull load - 3,800

**GAGE BILT TOOLS ARE AVAILABLE WORLDWIDE
 E-MAIL US FOR A DISTRIBUTOR NEAR YOU**

GAGE BILT Inc.

GAGE BILT
 MADE IN U.S.A.

44766 Centre Court (586) 226-1500
 Clinton Twp. MI 48038 (586) 226-1505 Fax
 e-mail:solutions@gagebilt.com / www.gagebilt.com

DESCRIPTION

The GB752 series are pneumatic-hydraulic tools designed specifically for the efficient installation of a wide range of blind rivets. They can be operated in any position with one hand. They have a rated pull load of 3800 pounds with 90 psi air pressure at the air inlet.

The GB752SH and GB752SR riveters offer a unique “split” system providing the operator with an ergonomic tool with reduced hand held weight, as shown below.

The GB752 series riveters operate on a wide range of air pressure, with 90 to 100 psi providing the maximum efficiency. At 90 psi air pressure, the GB752 series does not exceed 81.5 db (A) and consumes 3 cfm at 20 cycles a minute.

The air inlet is provided with 1/4-18 female pipe threads to accept the users air hose fitting.

NOSE ASSEMBLIES ARE NOT FURNISHED WITH TOOL AND MUST BE ORDERED SEPARATELY.

GB752 SERIES SELECTION CHART



FASTENER	DIA.	STRAIGHT		*RIGHT ANGLE	**OFFSET
COMMERCIAL LOCKBOLTS	3/16 1/4	LB06-722-20 LB08-722-20	LB06-722-60 LB08-722-60		
MULTIGRIP LOCKBOLTS	3/16 1/4	MG06-722-20 MG08-722-20	MG06-722-60 MG08-722-60		
BLIND BOLT (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U CR7000 SERIES, BACB30YY, YU, & YT	1/8	SMLS04-752C-20	SMLS04-752C-45		
	5/32	SB05-752C-20	SB05-752C-45	SB05-751B-54RA	SB05-752A-43OS
	3/16	SB05-752C-80 SB06-752C-20 SB06-752C-45 SB06-752C-80	SB06-752C-45	SB06-751B-54RA	SB06-204D-27OS
EN6122 & UAB130-EU EN6127 & UAB6127-EU EN6128 & UAB100-EU EN6129 & UABP-EU	3/16			UAB06-751B-54RA	UAB06-752A-43OS
BLIND RIVET (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER NAS1900 S & U SERIES	1/8	SMLS04-752C-20	SMLS04-752C-45	SMLS04-751B-54RA	SMLS04-752A-43OS
	5/32	SMLS05-752C-20	SMLS05-752C-45	SMLS05-751B-54RA	SMLS05-752A-43OS
	3/16	SMLS06-752C-20	SMLS06-752C-45	SMLS06-751B-54RA	SMLS06-752A-43OS
	1/4	SMLS08-713-20	SMLS08-713-45		SMLS08-204D-27OS
"A" CODE NAS1398A & NAS1399A	3/32	3A-352B-25		3A-751B-54RA	
	1/8	4A-752C-20	4A-752C-45	4A-751B-54RA	4A-752A-43OS
	5/32	5A-752C-20	5A-752C-45	5A-751B-54RA	5A-752A-43OS
	3/16	6A-752C-20	6A-752C-45	6A-751B-54RA	6A-752A-43OS
	1/4	SMLS08-713-20			SMLS08-204D-27OS
NUT PLATE RIVETS CCR244/264/274 BACR15DR MS20600	3/32	3NP-751-23	3NP-352-61	3NP-751B-54RA	3NP-751-43OS
	1/8	5N-751-23	5N-352-61	45N-751B-54RA	5N-751-43OS
CHERRYMAX®, CHERRYMAX® 'AB', MBC® LOCK CREATOR BACR15FR/FP, BACR15GF/GK, NAS1900 S & U SERIES BLIND RIVET WITH DRIVE WASHER	1/8	2 456MAX-751A-21	2 456MAX-751A-61	2 456MAX-751C-54RA	2 456MAX-731-43OS
	5/32				
	3/16				
	1/4	08MAX-752C-20	08MAX-752C-45		**08MAX-204D-27OS **08MAX-204D-37OS
ASP® ASP 2, ASP PF, ASP 4 FF, ASP 2 F, ASP 2 LC	13/64	ASP06-752C-20	ASP06-752C-45	ASP06-751B-54RA	ASP06-752A-43OS
	17/64	ASP08-752C-20	ASP08-752C-45		ASP08-752A-43OS
NAS1719, NAS1720 NAS1721	1/8	MBC04-752C-20	MBC04-752C-45	MBC04-751A-54RA	MBC04-752A-43OS
	5/32	MBC05-752C-20	MBC05-752C-45	MBC05-751A-54RA	MBC05-752A-43OS
	3/16	MBC06-752C-20	MBC06-752C-45	MBC06-751A-54RA	MBC06-752A-43OS
GROUND STUD, MB3454 & BACS53B	8/32	GS8-752C-20	GS8-752C-45	GS8-751B-54RA	GS8-752A-43OS
	10/32	GS10-752C-20	GS10-752C-45	GS10-752A-54RA	GS10-752A-43OS
OPEN END, CLOSED END, C'SUNK, PROTRUDING HEAD COMMERCIAL NAIL RIVETS	3/32	3N-751-23	3N-352-61	3N-751B-54RA	3N-751-43OS
	1/8	4N-751-23	4N-352-61	45N-751B-54RA	4N-751-43OS
	5/32	5N-751-23	5N-352-61	45N-751B-54RA	5N-751-43OS
	3/16	6N-751-23	6N-352-61	6N-751C-54RA	6N-751-43OS

ASP® IS A REGISTERED TRADEMARK OF ALCOA INC. CHERRYMAX® AND MBC® ARE REGISTERED TRADEMARKS OF CHERRY AEROSPACE FASTENERS.

GAGE BILT CERTIFIES THE GB752 WILL INSTALL THE ABOVE FASTENERS

*ALL RIGHT ANGLE NOSES REQUIRE 752142 STROKE LIMITER.
**ALL OFFSET 204 SERIES NOSES REQUIRE 751204 ADAPTER.
1) RIGHT ANGLE NOSE ASSEMBLY'S MAY REQUIRE MORE THAN ONE PULL.
2) INSTALLS 1/8, 5/32 & 3/16 DIAMETERS
3) INSTALLS 5/32 & 3/16 DIAMETERS

NOTE: THE LAST 2 DIGITS OF THE NOSE ASSEMBLY REPRESENTS THE LENGTH THE NOSE EXTENDS FROM THE TOOL. I.E. -20 = 2.0 INCHES

12/11