


GBP4801B/GBP4801B(A)

HYDRAULIC INSTALLATION TOOL

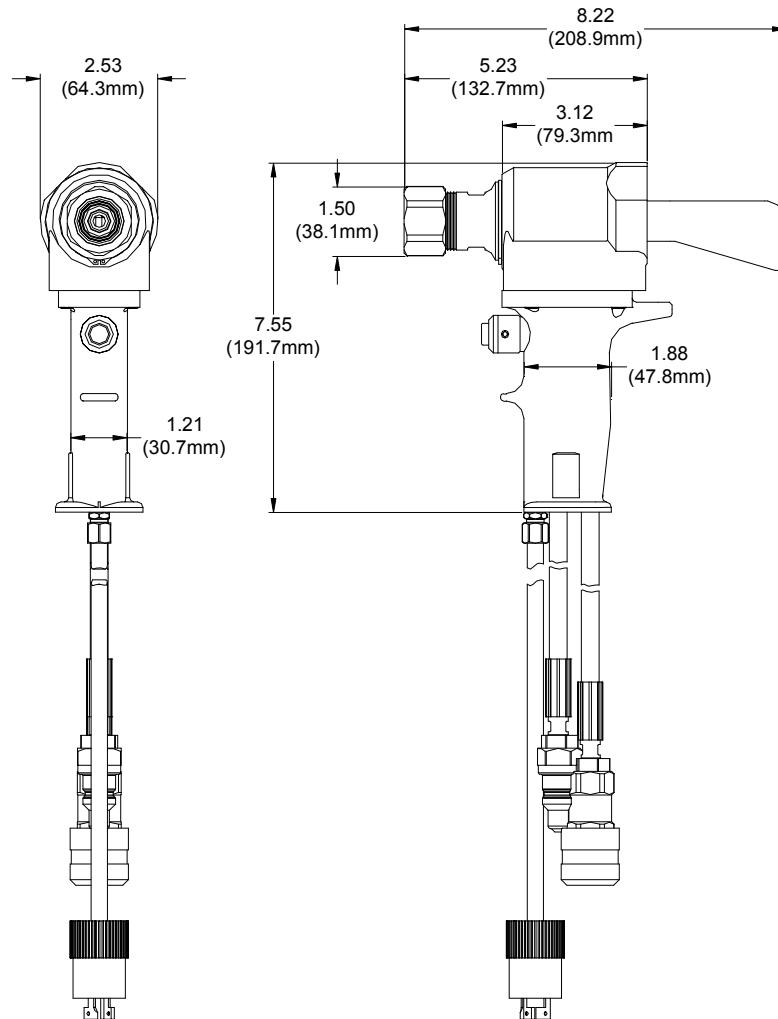

DESCRIPTION

The GBP4801B is a hydraulic installation tool designed specifically for the efficient installation of a wide range of blind, lockbolt and Magna-Grip® fasteners thru 3/8" diameter. It weighs just under 8 lbs. and can be operated in any position with one hand. It has a 1.000" rivet setting stroke and a rated pull load of 11,000 pounds.

The GBP4801B installation tool operates on hydraulic pressure developed by the GBP940 powerunit set at 5600 psi maximum PULL pressure and 2400 psi maximum RETURN pressure. The tool comes equipped with 12 ft. hoses and electric cord kit complete with quick disconnects. The GBP4801B(A) installation tool operates on hydraulic pressure developed by the GBP910 Powerunit set at 5600 psi maximum PULL pressure and 2400 psi maximum RETURN pressure. The tool comes equipped with 12 feet of hydraulic hoses, and couplings.

NOSE ASSEMBLIES ARE NOT FURNISHED WITH THIS RIVETER AND MUST BE ORDERED SEPARATELY.

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.
44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

SELECTION CHART FOR GBP4801B/4801B(A)



FASTENER	DIA.	STRAIGHT		*OFFSET	
ASP® 2 ASP & ASP PF ASP FF & ASP F ASP-LC	13/64 17/64 21/64	ASP06-745C-23 ASP08-745C-23 ASP10-755-23	ASP06-745C-48 ASP08-745C-48 ASP10-755-48	ASP06-204D-27OS ASP08-204D-27OS ASP10-204D-27OS	ASP06-204D-37OS ASP08-204D-37OS ASP10-204D-37OS
BOM® BLIND OVERSIZE MANDREL	1/4 5/16 3/8	BOM08-745C-23 BOM10-756-26 BOM12-756A-26			
COMMERCIAL LOCKBOLTS C6L® AVDELOK®	3/16 1/4 5/16 3/8	NAS06-745B-12 NAS06-755-23 NAS08-745B-12 NAS08-755-23 LB10-745C-26 LB12-756-26	NAS06-755-48 NAS08-755-48 NAS10-756-48 NAS12-756-48	NAS06-204C-25OS NAS06-204C-34OS NAS08-204C-25OS NAS08-205A-31 NAS10-205C-31 NAS12-205A-31	NAS06-204C-30OS NAS08-204C-30OS NAS08-204C-34OS
CONTAINER BOLT	3/8	HT12-745B-28			
FLOOR BOLT	5/16	FT10-353A-28			
LGP® LIGHTWEIGHT GROOVE PROPORTION LOCKBOLTS	5/32 3/16 1/4 5/16 3/8	LGP05-745B-12 LGP05-755-48 LGP06-745B-12 LGP06-755-48 LGP08-745B-12 LGP08-755-48 LGP10-745B-12 LGP10-756-48 LGP12-745B-12 LGP12-756-48	LGP05-755-23 LGP06-755-23 LGP08-755-23 LGP10-756-26 LGP12-756-26	LGP05-204C-25OS LGP05-204C-34OS LGP06-204C-25OS LGP06-204C-34OS LGP08-204C-25OS LGP08-204C-34OS LGP10-205A-31 LGP12-205A-31	LGP05-204C-30OS LGP06-204C-30OS LGP08-204C-30OS LGP08-204C-30OS LGP08-205A-31
LOCKBOLT NAS SHEAR PULL TYPE NAS TENSION PULL TYPE & GROOVE PROPORTION NASS = NAS SHEAR NAST = NAS TENSION	5/32 3/16 1/4 5/16 3/8	NASS05-755-12 NASS05-755-23 NASS05-755-48 NAS06-745B-12 NAS06-755-48 NAS08-745B-12 NAS08-755-48 NAS10-745B-12 NAS10-756-48 NAS12-745B-12 NAS12-756-48	NAST05-745B-12 NAST05-755-23 NAST05-755-48 NAS06-755-23 NAS08-755-23 NAS10-756-26 NAS12-756-26	NASS05-204C-25OS NASS05-204C-30OS NASS05-204C-34OS NAS06-204C-25OS NAS06-204C-34OS NAS08-204C-25 NAS08-204C-34 NAS10-205C-31 NAS12-205A-31	NAST05-204C-20OS NAST05-204C-30OS NAST05-204C-34OS NAS06-204C-30OS NAS08-204C-30 NAS08-205A-31
MULTI-GRIP LOCKBOLT	3/16 1/4 5/16 3/8	MG06-745-48 MG08-745-48 MG10-756-28 MG12-756-28			
MULTI-GRIP STRUCTURAL BLIND RIVET	3/8	MGL12-353C-28			
OVERSIZE STRUCTURAL RIVET	1/4 5/16 3/8	OS08-745-48 OS10-756-26 OS12-756A-26	OS10-756-48 OS12-756A-48		
BLIND BOLT (SINGLE ACTION) WITH OR W/O DRIVE WASHER MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U CR7000 SERIES, BACB30YY, YU, & YT	5/32 3/16 1/4 5/16 3/8	SB05-745C-23 SB06-745C-23 SB08-755-23 SB10-756-28 SB12-756-28	SB05-745C-48 SB06-745C-48 SB08-755-48 SB10-756-48 SB12-756-48	SB05-204D-27OS SB06-204D-27OS SB08-204D-27OS SB08-205A-35 SB10-205A-35 SB12-205A-35	SB05-204D-37OS SB06-204D-37OS SB08-204D-37OS

ASP®, BOM®, C6L®, AND LGP® ARE REGISTERED TRADEMARKS OF ALCOA INC. AVDELOK® IS A REGISTERED TRADEMARK OF AVDEL UK LIMITED.


GAGE BILT CERTIFIES THE GBP4801B/4801B(A) TOOL WILL INSTALL THE ABOVE FASTENERS

*ALL OFFSET 204 SERIES NOSES REQUIRE 353204 ADAPTER WITH 480152 STROKE LIMITER AND 480157 RELIEF VALVE.

*ALL OFFSET 205 SERIES NOSES REQUIRE 353205 ADAPTER WITH 480153 STROKE LIMITER AND 480156 RELIEF VALVE.

NOTE: THE LAST 2 DIGITS OF THE NOSE ASSEMBLY REPRESENTS THE LENGTH THE NOSE EXTENDS FROM THE TOOL I.E. -20 = 2.0 INCHES

12/11



GAGE BILT ALSO SUPPLIES PIN & COLLAR SWAGE INSPECTION GAGES TO CERTIFY CORRECT SWAGE INSTALLATION.



Rev. 3/11