


GBP722

INSTALLATION TOOL

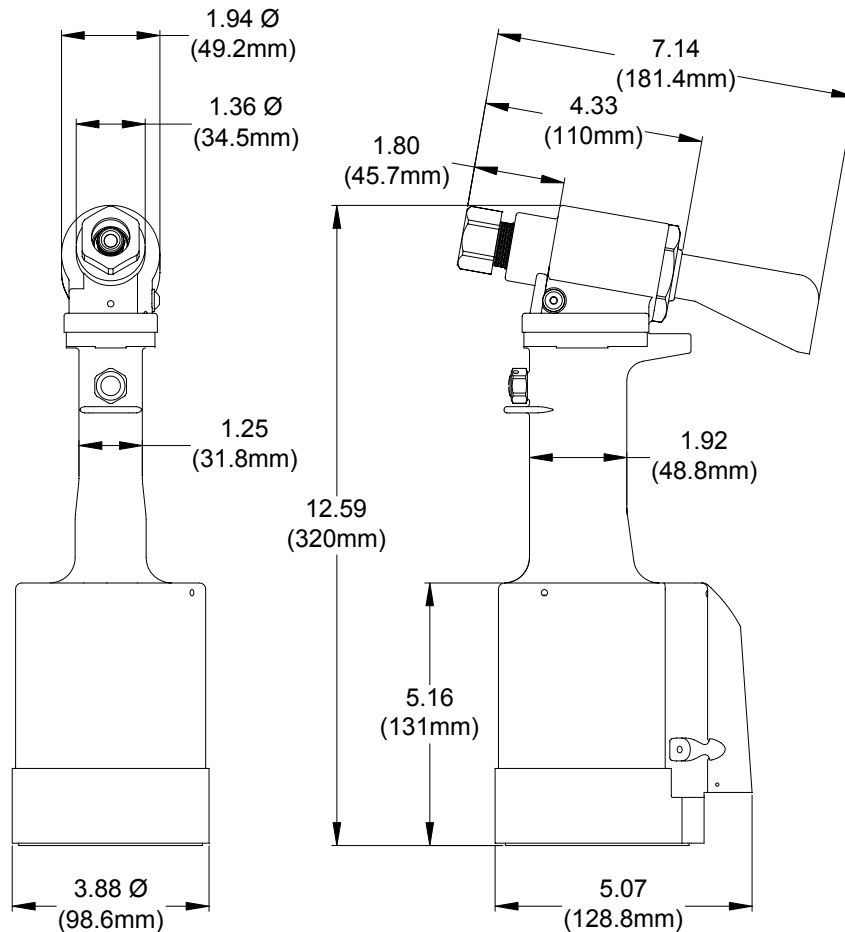

DESCRIPTION

The GBP722 is a pneumatic-hydraulic tool designed specifically for the efficient installation of a wide range of blind rivets. It weighs 5.50 lbs. and can be operated in any position with one hand. It has a .590" rivet setting stroke and a rated pull load of 4700 pounds with 90 psi air pressure at the air inlet.

The GBP722 riveter operates on a wide range of air pressure, with 90 to 100 psi providing the maximum efficiency. At 90 lbs air pressure, the GBP722 does not exceed 85 db (A) and consumes 3 cfm at 20 cycles a minute.

The air inlet is provided with 1/4-18 female pipe threads to accept the users air hose fitting.

NOSE ASSEMBLIES ARE NOT FURNISHED WITH TOOL AND MUST BE ORDERED SEPARATELY.

GAGE BILT
MADE IN U.S.A.

GAGE BILT PRODUCTS CORP.

14500 Barber Drive (586) 771-7664
Warren, Mi 48088 (586) 771-2665 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com



SELECTION CHART FOR GBP722



FASTENER	DIA.	STRAIGHT		*RIGHT ANGLE ₂	**OFFSET
COMMERCIAL LOCKBOLTS	3/16 1/4	LB06-722-20 LB08-722-20	LB06-722-60 LB08-722-60		
MULTIGRIP LOCKBOLTS	3/16 1/4	MG06-722-20 MG08-722-20	MG06-722-60 MG08-722-60		
"S" TYPE BLIND BOLT MS90353S, MS90354S MS21140S, MS21141S	5/32	SB05-752B-20	SB05-752B-45	SB05-751B-54RA	SB05-752A-43OS
	3/16	SB05-752B-80 SB06-752B-20 SB06-752B-80	SB06-752B-45	SB06-751B-54RA ₅	SB06-752A-43OS
	1/4 ₄	SB08-713-20 ₄	SB08-713-45 ₄		SB08-204C-27OS ₄ SB08-204C-37OS ₄
"U" TYPE BLIND BOLT WITH LOCKING WASHER MS90353U & MS90354U MS21140U & MS21141U	5/32	UBB05-752B-20	UBB05-752B-45	UBB05-751B-54RA	UBB05-752A-43OS
	3/16	UBB06-752B-20	UBB06-752B-45	UBB06-751B-54RA ₅	UBB06-752A-43OS
	1/4 ₄	UBB08-713-20 ₄	UBB08-713-45 ₄		UBB08-204C-27OS ₄ UBB08-204C-37OS ₄
EN6122 & UAB130-EU EN6127 & UAB6127-EU EN6128 & UAB100-EU EN6129 & UABP-EU	1/8	UAB04-752B-20	UAB04-752B-45	UAB04-751B-54RA	UAB04-752A-43OS
	5/32	UAB568-713-21 ₃	UAB568-713-61 ₃	UAB05-751B-54RA	UAB05-752A-43OS
	3/16			UAB06-751B-54RA ₅	UAB06-752A-43OS
	1/4				UAB08-204C-27OS UAB08-204C-37OS
SINGLE ACTION BLIND RIVET NAS1919S NAS1921S	1/8	SMLS04-752B-20	SMLS04-752B-45	SMLS04-751B-54RA	SMLS04-752A-43OS
	5/32	SMLS05-752B-20	SMLS05-752B-45	SMLS05-751B-54RA	SMLS05-752A-43OS
	3/16	SMLS06-752B-20	SMLS06-752B-45	SMLS06-751B-54RA	SMLS06-752A-43OS
	1/4	SMLS08-713-20	SMLS08-713-45	SMLS08-751B-54RA	SMLS08-204C-27OS SMLS08-204C-37OS
UNIMATIC® SINGLE ACTION NAS1919U & NAS1921U BACR15FF/FR & BACR15GF/GK	1/8	UBR04-752B-20	UBR04-752B-45	UBR04-751B-54RA	UBR04-752A-43OS
	5/32	UBR05-752B-20	UBR05-752B-45	UBR05-751B-54RA	UBR05-752A-43OS
	3/16	UBR06-752B-20	UBR06-752B-45	UBR06-751B-54RA ₅	UBR06-752A-43OS
	1/4	UBR08-713-20	UBR08-713-45		UBR08-204C-27OS UBR08-204C-37OS
"A" CODE NAS1398A & NAS1399A	3/32	3A-352B-25		3A-751B-54RA	
	1/8	4A-752B-20	4A-752B-45	4A-751B-54RA	4A-752A-43OS
	5/32	5A-752B-20	5A-752B-45	5A-751B-54RA	5A-752A-43OS
	3/16	6A-752B-20	6A-752B-45	6A-751B-54RA	6A-752A-43OS
	1/4	SMLS08-713-20	SMLS08-713-45	SMLS08-751B-54RA ₅	SMLS08-204C-27OS SMLS08-204C-37OS
PROTRUDING HEAD, MULTI-GRIP BLIND RIVETS	3/16	MGL06-752A-21 ₆	MGL06-752A-61 ₆	MGL06-751B-54RA ₆	
	1/4	MGL08-752A-21 ₆	MGL08-752A-61 ₆		
COUNTERSUNK HEAD, MULTI-GRIP BLIND RIVETS	3/16	6CN-752A-21 ₆	6CN-752A-61 ₆		
	1/4	8CN-752A-21 ₆	8CN-752A-61 ₆		
MONOBOLT	3/16	MB06-752A-21 ₆	MB06-752A-61 ₆	MB06-751B-54RA ₆	
	1/4	MB08-752A-21 ₆	MB08-752A-61 ₆		
CONTAINER BOLT(R 12) HLPP, HLP M, HLPE, HLPS HLPSC & HLP SM	3/8	HT12-713-20			
BACR15FR/FP, BACR15GF/GK, NAS1919U & 1921U, NAS9301-9312	1/8	456MAX-751A-21 ₁	456MAX-751A-61 ₁	456MAX-751C-54RA ₁	456MAX-752-42OS ₁
	5/32				
	3/16				
	1/4	08MAX-752B-20	08MAX-752B-45		08MAX-204C-27OS 08MAX-204C-37OS
ASP 2, ASP PF, ASP 4 FF, ASP 2 F, ASP 2 LC	13/64	ASP06-752B-20	ASP06-752B-45	ASP06-751B-54RA	ASP06-752A-43OS
	17/64	ASP08-752B-20	ASP08-752B-45	ASP08-751B-54RA	ASP08-752A-43OS
	21/64	ASP10-713-20	ASP10-713-45		ASP10-204C-27OS ASP10-204C-37OS
NAS1719, NAS1720 NAS1721	1/8	MBC04-752B-20	MBC04-752B-45	MBC04-751A-54RA	MBC04-752A-43OS
	5/32	MBC05-752B-20	MBC05-752B-45	MBC05-751A-54RA	MBC05-752A-43OS
	3/16	MBC06-752B-20	MBC06-752B-45	MBC06-751A-54RA	MBC06-752A-43OS
GROUND STUD, M83454 & BACS53B	8/32	GS8-752B-20	GS8-752B-45	GS8-751B-54RA	GS8-752A-43OS
	10/32	GS10-752B-20	GS10-752B-45	GS10-752A-54RA	GS10-752A-43OS

THE GAGE BILT GBP722 IS APPROVED TO INSTALL THE ABOVE FASTENERS.

*ALL RIGHT ANGLE NOSE ASSEMBLIES REQUIRE 722140 STROKE LIMITER.
**ALL OFFSET 204 SERIES NOSES REQUIRE 751204 ADAPTER.
1) INSTALLS 1/8 5/32 & 3/16 DIAMETERS
2) RIGHT ANGLE NOSE ASSEMBLIES MAY REQUIRE MORE THAN ONE PULL.
3) INSTALLS 5/32, 3/16 & 1/4 DIAMETERS.
4) 105 PSI REQUIRED FOR ALLOY STEEL.
5) THESE NOSES FOR LIGHT DUTY / REPAIR ONLY.
6) 2 PULLS REQUIRED FOR MOST APPLICATIONS.

NOTE: THE LAST 2 DIGITS OF THE NOSE ASSEMBLY REPRESENTS
THE LENGTH THE NOSE EXTENDS FROM THE TOOL. I.E. -20 = 2.0 INCHES