


GBP730E

INSTALLATION TOOL

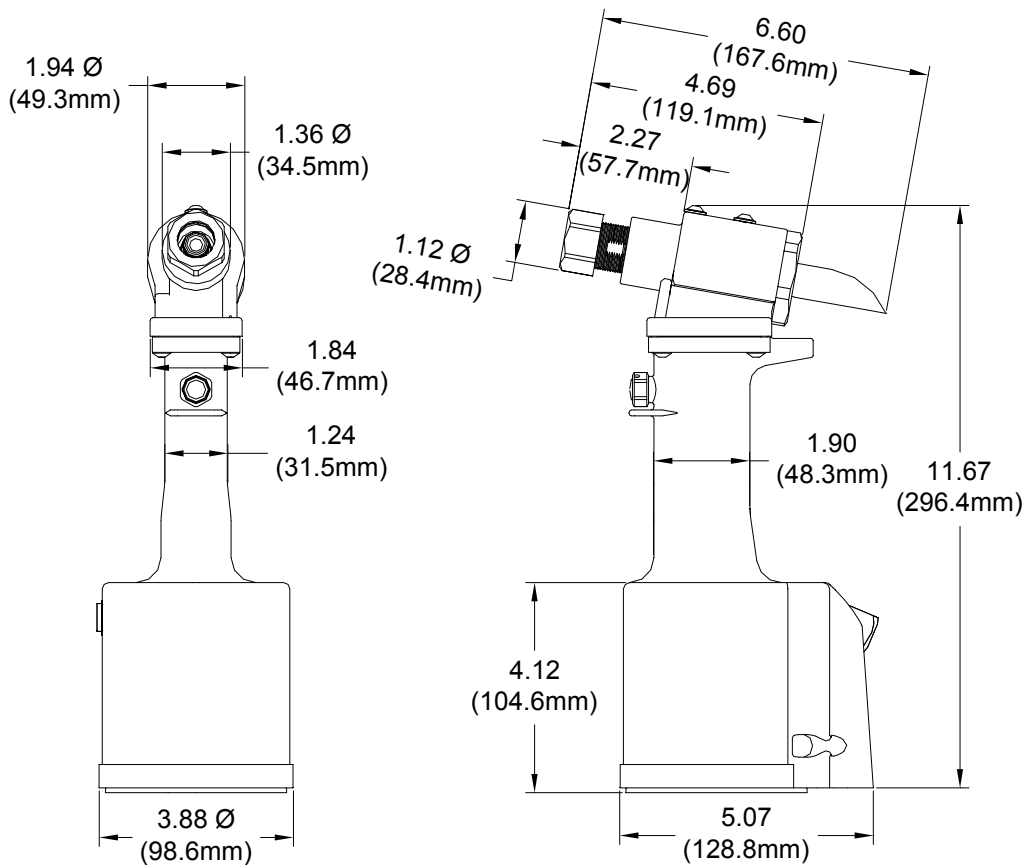

**GAGE BILT TOOLS ARE AVAILABLE WORLDWIDE
E-MAIL US FOR A DISTRIBUTOR NEAR YOU**

DESCRIPTION

Covered under Patent No. 5,485,727

The GBP730E is a pneumatic-hydraulic tool designed specifically for the efficient installation of a wide range of blind rivets and lockbolts. It weighs just under 4.7 lbs. and can be operated in any position with one hand. It has a .500 rivet setting stroke and a rated pull load of 4000 pounds on 90 psi air pressure at the air inlet.

The GBP730E riveter operates on a wide range of air pressure, with 90 to 100 psi providing the maximum efficiency. At 90 lbs. air pressure, the GBP730E does not exceed 85 db (A) and consumes 3.9 cfm at 20 cycles per minute.

The air inlet is provided with 1/4-18 female pipe threads for accepting the user's air hose fitting.

NOSE ASSEMBLIES ARE NOT FURNISHED WITH THIS RIVETER AND MUST BE ORDERED SEPARATELY.

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com



SELECTION CHART FOR GBP730E



FASTENER	DIA.	STRAIGHT		RIGHT ANGLE	OFFSET	
'A' CODE NAS1398 & NAS1399 'A'	3/32	3A-352B-25		3A-751B-54RA		
	1/8	4A-752B-20	4A-752B-45	4A-751B-54RA	4A-752A-43OS	
	5/32	5A-752B-20	5A-752B-45	5A-751B-54RA	5A-752A-43OS	
	3/16 1/4	6A-752B-20 SMLS08-713-20	6A-752B-45	6A-751B-54RA	6A-752A-43OS SMLS08-752A-43OS	
2 ASP & ASP PF ASP FF & ASP F ASP-LC & MA F	13/64	ASP06-752B-20	ASP06-752B-45	ASP06-751B-54RA	ASP06-752A-43OS	
	17/64	ASP08-752B-20	ASP08-752B-45	ASP08-751B-54RA	ASP08-752A-43OS	
COMMERCIAL LOCKBOLTS C6L ADVELOK	3/16	LB06-713-20			NAS06-204C-25OS NAS06-204C-34OS	
	1/4	LB08-713-20			NAS08-204C-25OS NAS08-204C-34OS	
LGP LOCKBOLT	5/32	LGP05-730B-10	LGP05-731-20		LGP05-204C-25OS LGP05-204C-30OS	
	3/16	LGPL2SC-V BACB30VM LGPL18SC-V BACB30XT LGPL4SC-V ABS0548 LGP2SP-V BACB30VN LGPL4SP-V ASNA2392 LGPL8SC-V BACB30WD LGPL9SC-V BACB30WB LGPL9SP-V BACB30VY	LGP05-731-45 LGP06-730B-10 LGP06-731-45	LGP06-731-20		LGP05-204C-34OS LGP06-204C-25OS LGP06-204C-30OS LGP06-204C-34OS
NAS and GP SHEAR/TENSION LOCKBOLTS		5/32	NASS05-730B-10 NAST05-730B-10 NASS05-731-20 NAST05-731-20 NASS05-731-45 NAST05-731-45			NASS05-204C-25OS NAST05-204C-20OS NASS05-204C-30OS NAST05-204C-30OS NASS05-204C-34OS NAST05-204C-34OS
		3/16	NAS06-730B-10 NAS06-731-20 NAS06-731-45			NAS06-204C-25OS NAS06-204C-30OS NAS06-204C-34OS
BACB30TY BACB30UA BACB30TZ BACB30UB BACB30DY BACB30GX BACB30DX BACB30GP BACB30GO BACB30GY BACB30GW		1/8	456MAX-751A-21 ₂	456MAX-751A-61 ₂	456MAX-751C-54RA ₂	456MAX-731-43OS
	5/32					
	3/16					
	1/4	08MAX-752B-20	08MAX-752B-45	08MAX-713-58RA	08MAX-204D-27OS 08MAX-204D-37OS	
BLIND BOLTS MS90353S & U & MS90354S & U MS21140S & U & MS21141S & U CR7000 SERIES BACB30Y, YU, & YT	5/32	SB05-752C-20	SB05-752C-45	SB05-751B-54RA	SB05-752A-43OS	
	3/16	SB05-752C-80				
		SB06-752C-20	SB06-752C-20	SB06-751B-54RA	SB06-204D-27OS	
BLIND BOLTS MS90353 & MS90354 MS21140 & MS21141 "U" TYPE BLIND BOLT WITH DRIVE WASHER	5/32	UBB05-752C-20	UBB05-752C-45	UBB05-751B-54RA	UBB05-752A-43OS	
	3/16	UBB06-752C-20	UBB06-752C-45	UBB06-751B-54RA	UBB06-752A-43OS	
EN6122 & UAB130-EU EN6127 & UAB6127-EU EN6128 & UAB100-EU EN6129 & UABP-EU	1/8	UAB04-752B-20	UAB04-752B-45	UAB04-751B-54RA	UAB04-752A-43OS	
	5/32	UAB568-713-21	UAB568-713-61	UAB05-751B-54RA	UAB05-752A-43OS	
	3/16			UAB06-751B-54RA	UAB06-752A-43OS	
SINGLE ACTION BLIND RIVET NAS1919S & U NAS1921S & U	1/8	SMLS04-752B-20	SMLS04-752B-45	SMLS04-751B-54RA	SMLS04-752A-43OS	
	5/32	SMLS05-752B-20	SMLS05-752B-45	SMLS05-751B-54RA	SMLS05-752A-43OS	
	3/16	SMLS06-752B-20	SMLS06-752B-45	SMLS06-751B-54RA	SMLS06-752A-43OS	
	1/4	SMLS08-713-20		SMLS08-713-58RA	SMLS08-752A-43OS	

THE GAGE BILT GBP730E TOOL IS APPROVED TO INSTALL THE ABOVE FASTENERS.

*ALL RIGHT ANGLE NOSES REQUIRE 730157 STROKE LIMITER.
*ALL OFFSET 204 SERIES NOSES REQUIRE 751204 ADAPTER.
1) RIGHT ANGLE NOSE ASSEMBLY'S MAY REQUIRE MORE THAN ONE PULL.
2) INSTALLS 1/8, 5/32 & 3/16 DIAMETERS
3) ALUMINUM ONLY

NOTE: THE LAST 2 DIGITS OF THE NOSE ASSEMBLY REPRESENTS THE LENGTH THE NOSE EXTENDS FROM THE TOOL I.E. -20 = 2.0 INCHES

GAGE BILT ALSO SUPPLIES PIN & COLLAR SWAGE INSPECTION GAGES TO CERTIFY CORRECT SWAGE INSTALLATION.

