


# GB50

## PNEUMATIC INSTALLATION TOOL

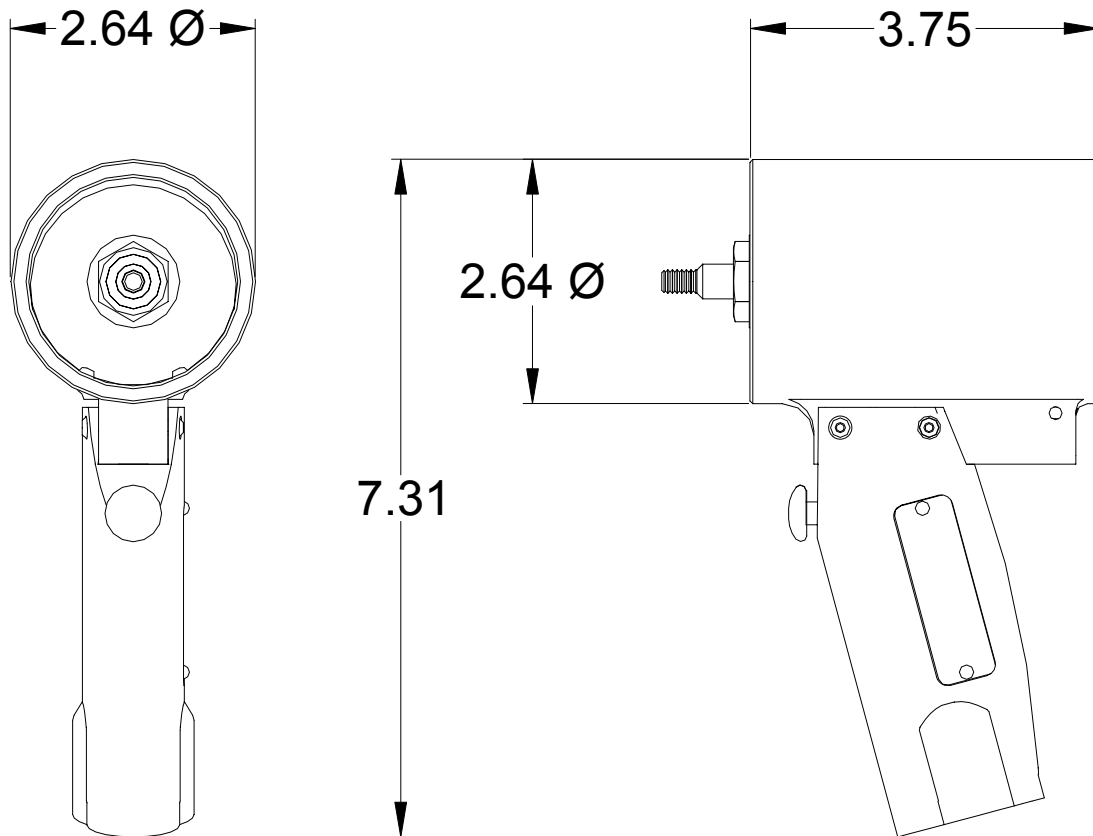

### DESCRIPTION

The GB50 pneumatic riveter is designed specifically for the most efficient installation of a wide range of blind rivets. It will install aluminum rivets through 5/32" diameter, and through 1/8" diameter rivets in any material. It weighs only 1.8 lbs. and can be operated in any position with one hand.

The GB50 Riveter is 7" high, has a .740 stroke and generates a minimum of 600 lbs. of pull at 90 psi. It operates from 90 to 100 psi of air pressure at the tool.

**NOSE ASSEMBLIES ARE NOT FURNISHED WITH THIS TOOL AND MUST BE PURCHASED SEPARATELY.**

**GAGE BILT**  
MADE IN U.S.A.

**GAGE BILT Inc.**

44766 Centre Court (586) 226-1500  
Clinton Twp. MI 48038 (586) 226-1505 Fax  
e-mail: [solutions@gagebilt.com](mailto:solutions@gagebilt.com) / [www.gagebilt.com](http://www.gagebilt.com)

# GB50 SELECTION CHART



FASTENER	DIA.	STRAIGHT	RIGHT ANGLE <sup>1</sup>	OFFSET
NUT PLATE RIVETS MS20600 SERIES CCR244/264/274 MS/9SP/PT BACR15CC/CF/DA/DR	3/32	3C-715B-43	3C-715-54RA	3C-715-40OS
	1/8	4C-715B-43	4C-715-54RA	4C-715-40OS
	5/32 <sub>2</sub>	5C-715B-43	5C-715-54RA	5C-715-40OS
"A" CODE NAS1398A, NAS1399A NAS1738A, NAS1739A	3/32	3A-715B-43	3A-715-54RA	3A-715-40OS
	1/8	4A-715B-43	4A-715-54RA	4A-715-40OS
	5/32 <sub>2</sub>	5A-715B-43	5A-715-54RA	5A-715-40OS
<b>BLIND RIVET (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER</b> NAS1900 S & U SERIES	1/8	SMLS04-715B-43	SMLS04-715-54RA	SMLS04-715A-40OS
	5/32 <sub>2</sub>	SMLS05-715B-43	SMLS05-715-54RA	SMLS05-715A-40OS
CHERRYMAX®, CHERRYMAX® 'AB', MBC® LOCK CREATOR BACR15FR/FP, BACR15GF/GK, NAS1900 S & U SERIES BLIND RIVET WITH DRIVE WASHER	1/8			
	5/32	456MAX-715-43	456MAX-715A-54RA	456MAX-715A-40OS
	3/16			
N, Q & E POP®, CLOSED END AVEX® & COMMERCIAL RIVETS	3/32	3N-715E-43	3N-715-54RA	3N-715-40OS
	1/8 <sub>3</sub>	4N-715E-43	4N-715-54RA	4N-715-40OS
	5/32 <sub>2</sub>	5N-715E-43	5N-715-54RA	5N-715-40OS

POP® IS A REGISTERED TRADEMARK OF EMHART TECHNOLOGIES. AVEX® IS A REGISTERED TRADEMARK OF AVDEL UK LIMITED. CHERRYMAX® AND MBC® ARE REGISTERED TRADEMARKS OF CHERRY AEROSPACE.

### GAGE BILT CERTIFIES THE GB50 WILL INSTALL THE ABOVE FASTENERS

1) RIGHT ANGLE NOSE ASSEMBLYS MAY REQUIRE MORE THAN ONE PULL.
2) ALUMINUM ONLY.
3) ALUMINUM & STEEL ONLY.

NOTE: THE LAST 2 DIGITS OF THE NOSE ASSEMBLY REPRESENTS THE LENGTH THE NOSE  
EXTENDS FROM THE TOOL I.E. -20 = 2.0 INCHES

10/11